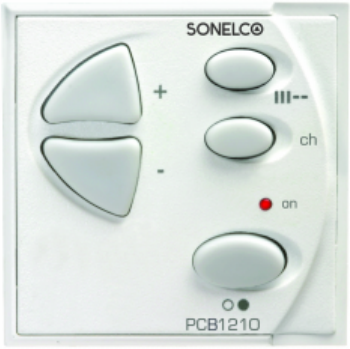


PCB1210

Background Music - Controls and Modules (45x45mm)

Amplifi er control 1+1W, with digital volume control, SCAN and channel change (in mode 2 mono channels).
3 possible operating modes using the confi gurable bridges SW1/SW2/SW3 :
Mode 1 - 1 stereo channel (Without bridges).
Mode 2: 1 mono channel + Warnings (Bridge SW2+SW3).
Mode 3 - 2 mono channels (Bridges SW1 y SW3).

GENERAL FEATURES

- Electronic ON / OFF switch.
- LED type operation indicator light.
- 32-step digital volume control button with volume memory (only with the device switched on).
- Stereo amplifier +1W with standard 8-Ohm loudspeaker outlet.
- SCAN function (remote change of radio transmitter in a SONELCO tuner).
- Voltage remote control.

TECHNICAL CHARACTERISTICS

Output Impedance:	8 Ohm.
Maximum Power:	1.5 + 1.5 W RMS
Maximum Current	En el terminal 3: 1,5 A
Frequency Response:	94Hz. - 22KHz. (-3dB)
Signal/Noise Ratio:	> 65 dB
Mains Input:	16 V DC
Maximum Consumption:	300 mA
Standby Consumption:	9 mA
Dimensions:	45x45x26,5 mm.
Weight:	29 gr.
Colours:	PCB1210-01 (White), PCB1210-02 (Graphite), PCB1210-10 (ivory coloured), PCB1210-12 (steel coloured)

INSTALLATION

Universal box.

Need a decorative frame. See accessories.

These features given for information only. Sonelco.com reserve the right to make changes without notice in order to improve the product. More information: (+34) 976 259 135 / (+34) 609 719 454 / sat@sonelco.com